



Generating Set Diesel

GE.BD.044/040.SS+011

Standard Equipment and features

Canopy - Soundproofing

- Soundproof canopy removable
- Polyester class1 soundproofing
- Snap handles with key lock
- Air inlet and air outlet Winding protection against water
- Inspection doors located to facilitate controls and servicing

Exhaust

- Direction pipe with rain cap
- Exhaust tubes protection guards
- Internal residential muffler -35 dbA

Fuel supply

- Single wall daily tank with bunded base
- Low fuel level shutdown automatic system
- Fuel gauge

Handling

- Lifting lug integrated in the lifting structure
- Anti-turning forklift pockets
- Base frame predisposed for not approved trailer
- Handling from the short side

Base Frame

- Anti pollution Bunded base with external draining point
- Anti vibrating mounting pads
- Battery compartment externally accessible for easy service

Engine

- High coolant temperature and low oil pressure shutdown system
- External oil drain points
- Engine liquids (oil and antifreeze)
- Tropicalized radiator
- Rotating components protection guards
- Alternator
- AVR Automatic Voltage Regulator

Protection & connection Panel

- Magneto-thermal protection on panel board
- Emergency stop button
- Socket module (only variant +12)
- Power outlet at the bottom
- Earth leakage point
- Machine electric wiring IP 44
- Startup battery (pre-charged)

Documentation

- CE conformity declaration User and maintenance manuals **Normatives**
- All Generating sets are compliant to CE Marking
- 2014/30/UE Electromagnetic compatibility
- 2000/14/CE Noise Emission for outdoor use
- Factory-designed systems built according to ISO 9001:2015



Data and technical specifications are subject to change in order to update or improve the products.

Elcos srl - S.S. 234 Km 58,25 Grumello Cremonese (CR) Italy tel. +39 0372 72330 fax. +39 0372 7233220 - info@elcos.net - www.elcos.net 1/8





Generating Set

-		
Speed	rpm	1500
Frequency	Hz	50
PRP Prime power	kVA	40
Prime power (cosfi 0,8)	KW	32
LTP Limited-time running power	kVA	44
Limited time running pow. (cosfi 0,8)	KW	35
Voltage standard	V	400/230
Current PRP (cosfi 0,8)	Α	58
loise level (+/- 3dB(A))		
LwA	dB(A)	90
Acoustic pressure level to 7 mt	dB(A)	65
Acoustic pressure level to 1 mt	dB(A)	74
uel consumption		
Fuel type	Туре	Diesel
Fuel tank capacity	lt	110
Autonomy at 3/4 load	h	16
Fuel consumption at 4/4 load	l/h	9.3
Fuel consumption at 3/4 load	l/h	6.8
Fuel consumption at 2/4 load	l/h	4.6
eneral Features		
Battery capacity	Ah	1x100
Voltage	Vdc	12
Exhaust temperature	C°	650
imensions / weight		
Dimensions (L x w x h)	cm	190x90x150
Weight inclusive of liquids (oil and antifreeze)	kg	890

It is the power that the generating set is capable to supply, in continuous operation, for an unlimited number of hours per year at the reference environmental conditions. This is valid as long as the engine undergoes a scheduled maintenance, as specified by the manufacturer. The generating set is able to provide power equal to 100% of the nominal load. COP power is typically 30% lower than the LTP one. No overload capability is allowed for this rating.

Applicable for supplying power in lieu of commercially purchased power. Prime power is the maximum power available at a variable load for an unlimited number of hours. A 10% overload capability is available for limited time. (Equivalent to Prime Power in accordance with ISO8528 and Overload Power in accordance with ISO3046, AS2789, DIN6271, and BS5514). This rating is not applicable to all generator set models.

Applicable for supplying emergency power for the duration of normal power interruption. No sustained overload capability is available for this rating. This rating is applicable to installations served by a reliable normal utility source. This rating is only applicable to variable loads with an average load factor of 80 percent of the standby rating for a maximum of 200 hours of operation per year and a maximum of 25 hours per year at 100% of its standby rating. The standby rating is only applicable to emergency and standby applications where the generator set serves as the back up to the normal utility source. No sustained utility parallel operation is permitted with this rating. (Equivalent to Fuel Stop Power in accordance with ISO3046, AS2789, DIN6271 and BS5514). Nominally Rated.

Data and technical specifications are subject to change in order to update or improve the products.

2/8 Elcos srl - S.S. 234 Km 58,25 Grumello Cremonese (CR) Italy tel. +39 0372 72330 fax. +39 0372 7233220 - info@elcos.net - www.elcos.net





H (ext. temp. 40°C)

87.8

elastic disk >=300% (3ln)

IP 23

autoventilate

2250

< 5 diode bridge

Engine

Factory		Baudouin
Emissions		Stage 0
Model		4M06G44/5
Speed governor		Electronic
Cooling system	Туре	liquid (water + 50% Paraflu11)
Speed	rpm	1500
Nominal power	CV	48.5
Gross engine power	KWm	35.7
Cycle	Туре	diesel 4 stroke
Injection	Туре	direct
Aspiration	Туре	Turbo
Numbers of cylinders	N°	4L
Bore x stroke	mm	89 x 92
Total displacement	lt	2.288
Engine oil features		15W40-API CI-4/CH-4 ACEA E5-E7
Engine oil consumption	%	<0.4% fuel consumption
Total oil capacity	lt	12
Coolant liquid capacity	lt	16
Alternator		
Factory *		Stamford
Model		S1L2-K1
Prime power 3F+N 400V (480V)	kVA	40
Prime power 1F+N 230V (240V)	kVA	16
Voltage regulator		+/-1%
Poles	N°	4
Phases	N°	3+N
Standard windings connection		star serie

%

RPM

%

* Availability will vary according to the warehouse stock. However, in any case a primary brand will be used.

Standard operating environmental conditions

Ambient temperature 25°C Relative Humidity 30% Max altitude 1000mt

Stator/rotor impregnation

Efficiency pf=0,8 4/4

Short circuit current

Degree of protection

Maxium overspeed

Waveform distortion

Couple engine

Cooling system

Exciter

Data and technical specifications are subject to change in order to update or improve the products.

Elcos srl - S.S. 234 Km 58,25 Grumello Cremonese (CR) Italy tel. +39 0372 72330 fax. +39 0372 7233220 - info@elcos.net - www.elcos.net 3/8






Control Systems on board



Variant +11 (QLE-A-O-SC (10-40)) Multifunction panel without switching on board

The multifunctional QLE panel is suitable for the management, protection and monitoring of generating sets when the mains fails (AMF) or in self-production continuous operating mode. The QLE panel has a double operating mode : MANUAL or AUTOMATIC, which guarantees the right protection, analysis and control of the generating set to every type of functionality. Variant +011 has separate switching inside a wall ATS panel optional. The output line is protected by a breaker which protects from overload, short circuit. The panel manages the QC panels directly or any transfer panel. Degree of protection IP44 (optional IP55 with cover plate).

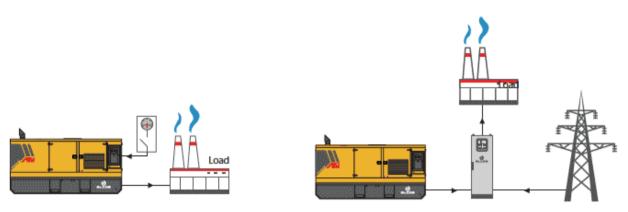

Data and technical specifications are subject to change in order to update or improve the products.

Elcos srl - S.S. 234 Km 58,25 Grumello Cremonese (CR) Italy tel. +39 0372 72330 fax. +39 0372 7233220 - info@elcos.net - www.elcos.net 4/8





Control module

Description

Elcos's control module MC2 is designed for diesel generator sets.

It offers outstanding protection, monitoring and control for small and middle size generator sets.

Elcos's control module MC2 incorporates a number of advanced features to meet the most demanding on-site applicaliton.

It includes USB port, LCD screen.

Applications:

• Emergency to the mains (AMF)



FEATURES

→ Controls

• Manual start up and stop • Automatic start up and stop from AMF Test NO load with external timer (only with AMF mode enable) Remote start from dry-contact (only with AMF mode disable) G.S. locked from external Emergency stop button Mains counter command closed Genset counter command closed

→ Engine Measures

• Fuel level % •Total operating hours Battery charger voltage Start up counter Engine speed

→ Alternator Measures

 Gen set voltage three-phase RST • Gen set star voltage RN.SN.TN. Gen set frequency

→ Main Measures

- Mains voltage RST
- Mains frequency

→ Equipment

- Microprocessor logic
- Backlit refractive display
- 10 events alarm history list
- Icons management
- •Troubleshooting with suggestions

Protections/Alarms →

- Failed to start
- Failed to stop
- Low oil pressure
- High temperature
- Generator battery charger
- Fuel reserve (Warning)
- No Fuel (Shutdown)
- Genset overvoltage
- Genset undervoltage Genset maximum frequency
- Genset minimum frequency Phase rotation

→ Signals

- Start up
- Stop
- Battery connected
- Battery charging
- Battery undervoltage
- Battery overvoltage
- Genset connected Mains connected
- Mains overvoltage
- Mains undervoltage
- Emergency button pressed

 Cumulative alarm (Protections/alarms) • Fuel reserve Nofuel

Data and technical specifications are subject to change in order to update or improve the products.

Elcos srl - S.S. 234 Km 58,25 Grumello Cremonese (CR) Italy tel. +39 0372 72330 fax. +39 0372 7233220 - info@elcos.net - www.elcos.net 5/8



Optional



Canopy - Soundproofing

- Canopy customized painting (RAL)
- Lift off doors kit
- IP 43 Conveyors

Exhaust

•

- Rain cap
- Exhaust collectors protection
- Exhaust flexible joint
- Exhaust flex tube
- (FAP) Antiparticulate Exhaust catalyst

Fuel supply

- Diesel connections
- Oversized big tank
- Automatic fuel refilling system
- Tank connections 3 way valve

Engine

- Engine heater 230 V
- Oil pressure & antifreeze temperature gauge (only with QPE panel)
- Oil change pump
- Electronic speed governor
- Battery DC circuit breaker
- -40 C° Engine liquids
- Super hot Engine heater 230 V
- Automatic refilling oil system
- 1000 working hours spare parts kit

Alternator

Parallel arranged AVR

Protection & connection Panel

Tamper proof panel

Panel

- ATS switching cabinet (QC) (only variant +11)
- UTIF counter with ARCUDI terminal box
- Remote control with 20 mt cable (only variant +12)
- Rental terminal box (n. a. on variant +12)
- Output power socket CE(only variant +11 with QPE panel)
- Differential protection

Other


- Toolbox for ordinary maintenance
- Off-road trailer
- On road trailer

Data and technical specifications are subject to change in order to update or improve the products.

Elcos srl - S.S. 234 Km 58,25 Grumello Cremonese (CR) Italy tel. +39 0372 72330 fax. +39 0372 7233220 - info@elcos.net - www.elcos.net 6/8





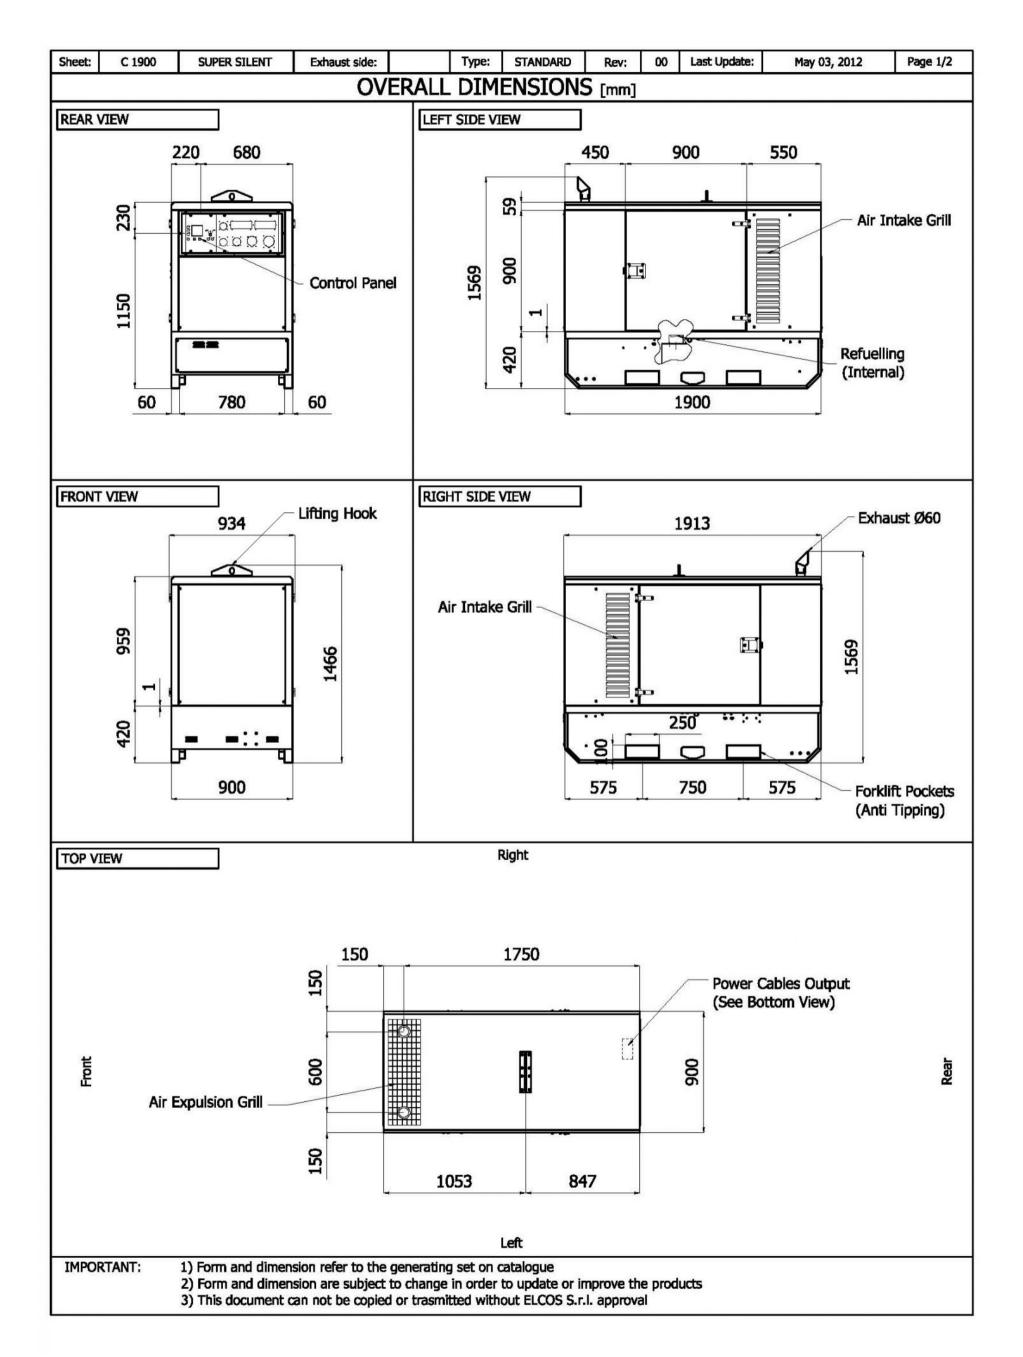


Data and technical specifications are subject to change in order to update or improve the products.

Elcos srl - S.S. 234 Km 58,25 Grumello Cremonese (CR) Italy tel. +39 0372 72330 fax. +39 0372 7233220 - info@elcos.net - www.elcos.net 7/8





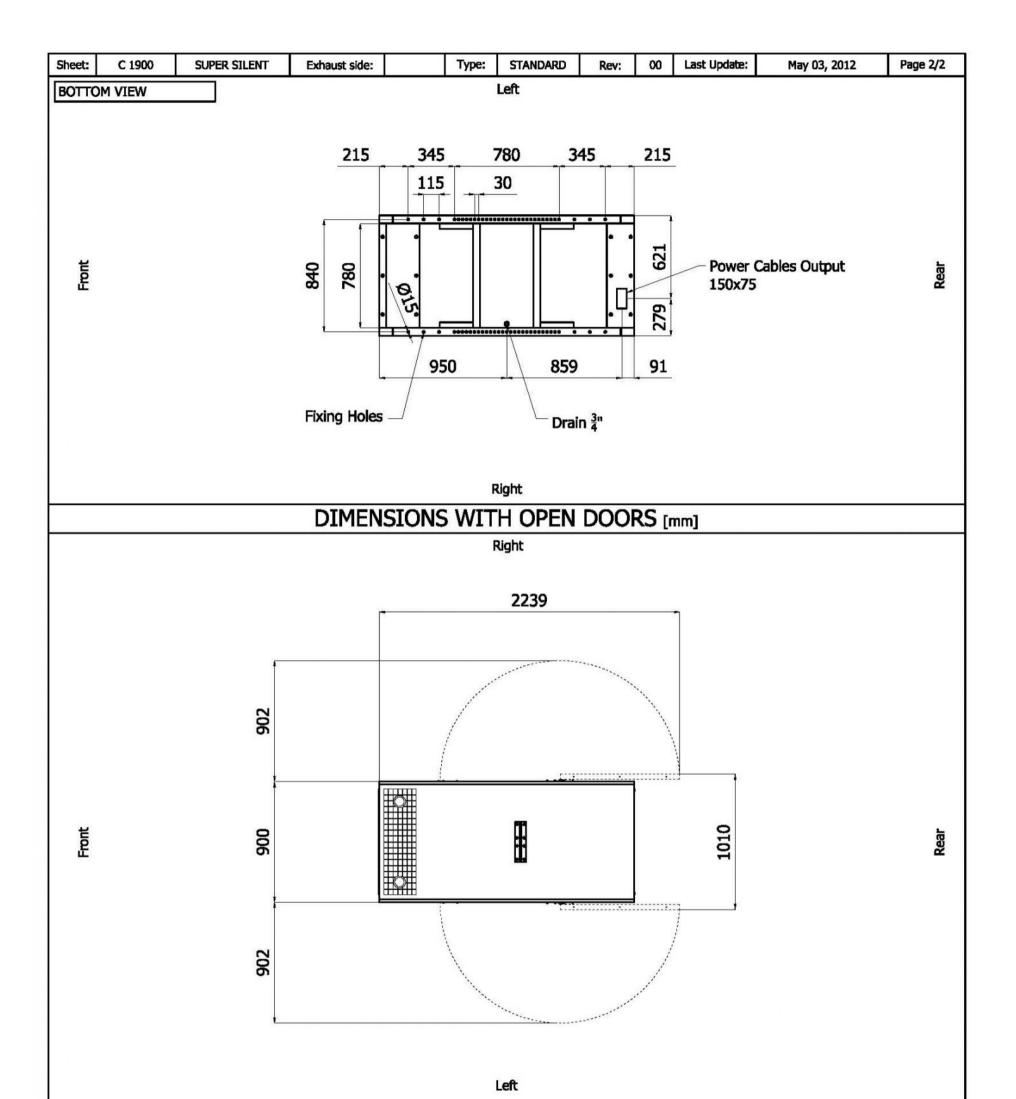

Note: With Lifting-Off Door Solution consider only canopy dimensions. (Models with "Control Panel" behind rear door will mount a special cover to protect it)

VENTILATION OF THE ROOM

The windows area in the generating set room needs to be (recommended):

Aspiration: 0.30 m2

Expulsion: 0.20 m2

ATTENTION: for a correct ventilation the expulsion air and the exaust gas needs to be conveyed in the open-air

 IMPORTANT:
 1) Form and dimension refer to the generating set on catalogue

 2) Form and dimension are subject to change in order to update or improve the products

 3) This document can not be copied or trasmitted without ELCOS S.r.l. approval

Data and technical specifications are subject to change in order to update or improve the products.

Elcos srl - S.S. 234 Km 58,25 Grumello Cremonese (CR) Italy tel. +39 0372 72330 fax. +39 0372 7233220 - info@elcos.net - www.elcos.net 8/8